
Bits for TORX® Screws





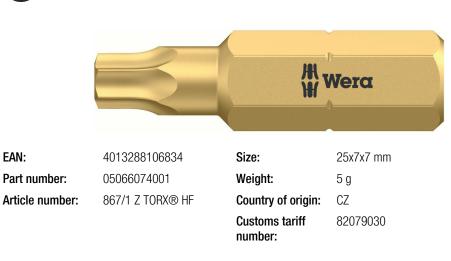

- For recessed TORX® screws
- Holding function for recessed TORX® screws
- 1/4" hexagon drive (Wera connecting series 1)
- Suitable for Bosch, Fein, Holz-Her, Lecreux, Metabo

High quality bits for recessed TORX® screws. The wedging forces resulting from the contact pressure between the drive tip and the screw profile securely hold the screw on the tool. 1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

## 867/1 Z TORX® HF bits with holding function, TX 20 x 25 mm

Bits for TORX® Screws

## The HF profile

Tough-absorbing bits

Tough-absorbing Wera bits (Z)

prevent any premature breakage

of the drive tip.





In tight assembly or disassembly situations, for example in engine compartments, it is not possible to securely hold the screw with the hand on the screwdriver, and the screw subsequently often gets lost. Lengthy searches or the loss of the screw (with the associated danger that could bring about) are the consequence. The HF tools developed by Wera are ideal because they feature an optimised geometry of the original TORX® profile. The wedging forces resulting from the surface pressure between the drive tip and the screw profile mean that the screw is securely held on the tool!

## Further versions in this product family:

	0	Å		Ø
		mm	inch	mm
05066070001	TX 8	25	1	2.2
05066071001	TX 9	25	1	2.4
05066072001	TX 10	25	1	2.5
05066073001	TX 15	25	1	3.0
05066074001	TX 20	25	1	3.7
05066075001	TX 25	25	1	4.1
05066076001	TX 27	25	1	4.8
05066077001	TX 30	25	1	5.4
05066078001	TX 40	25	1	6.5