








Prowadnica kulkowa VERSALITE ze spowalniczem H45
 Ball bearing slide VERSALITE with soft closing H45
 Шариковая направляющая VERSALITE с доводчиком H45

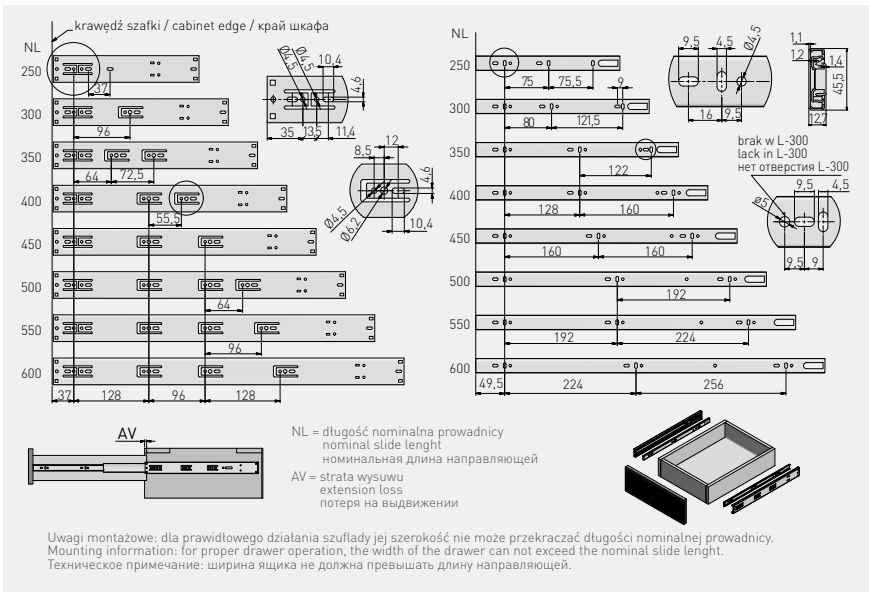

		 L mm	 AV mm	 kg		
PK-L-H45-250-A		250*	55	30	ocynk galvanized гальваника	stal steel сталь
PK-L-H45-300-A		300	15			
PK-L-H45-350-A		350	5			
PK-L-H45-400-A		400				
PK-L-H45-450-A		450				
PK-L-H45-500-A		500	0			
PK-L-H45-550-A		550				
PK-L-H45-600-A		600				

* Brak pełnego wysuwu / Not full extension / Неполное выдвижение

